



Copper Wire Pheasant Tail

Materials:


Hook:	Kamasan B402 12-20 TMC 100BL 12-20
Thread:	Fine copper wire
Tail&Body:	Pheasant tail fiber tips

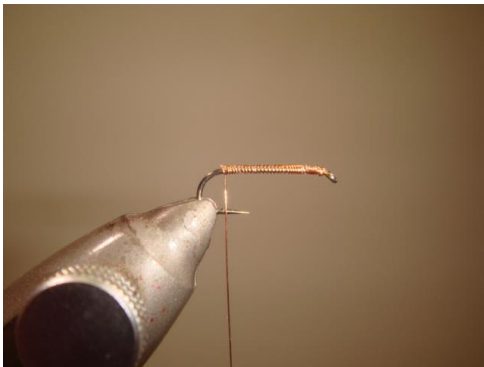


- 1 Tie in the copper wire at the eye of the hook
- 2 Wind it in close turns down to the curvature of the hook

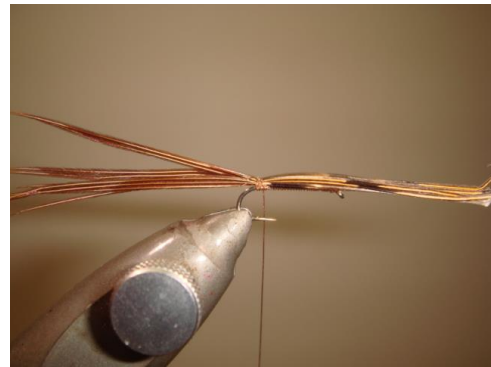

- 3 Tie in the Pheasant tail fiber tips as a tail

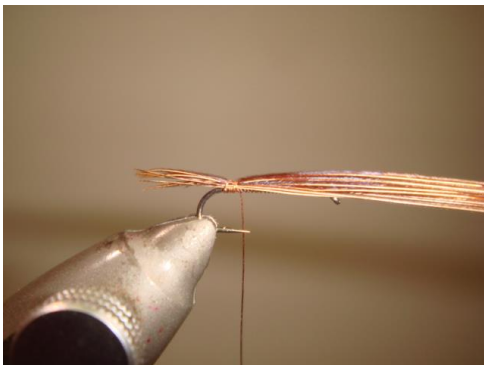

- 4 Adjust the length of the tail

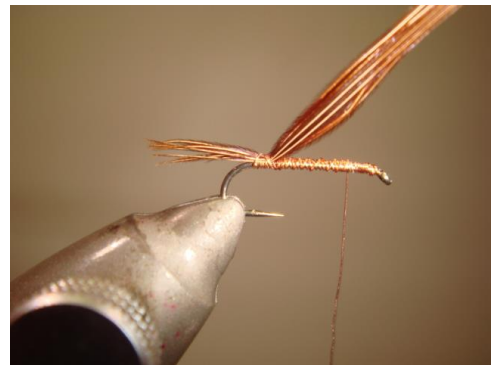

- 5 Wind the copper wire to the eye of the hook



- 6 Wind the pheasant tail fiber tips to the eye of the hook
- 7 Tie off the Fiber tips



- 8 Wind the thorax with the copper wire

© 2012





- 9 Flip the pheasant tail fiber tips over the thorax to the eye of the hook
- 10 Secure the pheasant tail fiber tips with 1 or 2 turns of wire



- 11 Flip the pheasant tail fiber tips backwards in direction of the curvature of the hook
- 12 Tie off the pheasant tail fiber tips



- 13 Cut off the excess of fiber tips
- 14 Apply a drop of instant glue on the copper wire



- 15 Wind 3-4 turns of copper wire to form the head
- 16 Wait for the instant glue to dry
- 17 Break the copper wire by moving it back and forth